


S12AF-RC-3524-25M

- 通过 USB 连接实现镜头聚焦、光圈电动控制 Connection via USB for controlling focus/iris
- 1.2 英寸 2500 万像素、80mm 工作距设计。1.2" 25Mp resolution, MOD WD80mm
- 配合无序被动聚焦系统 (IPRAS), 实现一键自动聚焦或 AOI 连续自动聚焦
Supported by IPRAS (Intelligent Passive Random Autofocus System) to autofocus or constantly autofocus under one key or AOI.

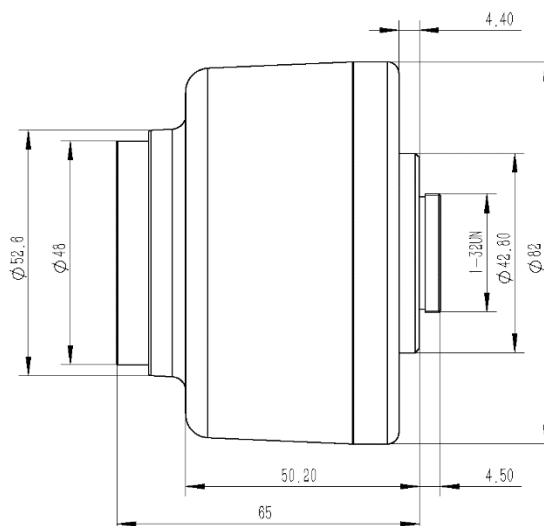

焦距EFL		35mm				工作距离 W.D	倍率 Mag.	1.2"		2/3			
靶面 Format		1.2" (Ø19.3)				80	0.4141	35.26	30.43	20.41	17.08		
分辨率Resolution		25MP				90	0.3722	39.22	33.85	22.70	18.99		
接口Mount		C				100	0.3383	43.16	37.24	24.98	20.90		
范围 Range	光圈 Aperture	F2.4 - 16				150	0.2276	64.15	55.36	37.13	31.06		
	聚焦 Focus	80mm				200	0.1729	84.44	72.87	48.87	40.89		
控制 Control	光圈 Iris	电动 Motorized				250	0.1389	105.09	90.69	60.82	50.89		
	聚焦 Focus	电动 Motorized (Auto-focus)				300	0.1163	125.52	108.32	72.64	60.78		
视场角 FOV	对角 Diagonal	1.2"	29.8°	1"	24°	2/3"	17.1°	350	0.1002	145.74	125.77	84.35	70.57
	水平 Horizontal		24°		20°		13.6°	400	0.0878	166.21	143.44	96.20	91.41
	垂直 Vertical		18.5°		14.8°		10.2°	450	0.0773	188.78	162.92	109.26	91.41
畸变 Distortion		0.06%				500	0.0705	207.15	178.77	119.89	100.31		
相对照度 Relative Illumination		80%				550	0.0637	229.16	197.77	132.63	110.97		
机械后焦 M.B.L		12.67mm				600	0.0589	248.00	214.03	143.54	120.10		
滤片尺寸 Filter Size		M46*0.75				700	0.0495	295.25	254.80	170.88	142.97		
控制接口 Control Mount		USB				800	0.0434	336.10	290.06	194.52	162.75		
工作温度 Working Temp.		-20°C ~ +70°C				900	0.0391	373.78	322.58	216.33	181.00		
重量Weight		327 g				1000	0.0348	419.66	362.17	242.89	203.22		