


SAF-RC2520-10M

- 通过USB 连接实现镜头聚焦、光圈电动控制 Connection via USB for controlling focus/Iris
- 2/3 英寸 1000 像素、80mm 工作距设计。2/3" 10Mpixel, macro working distance 80mm
- 配合无序被动聚焦系统（IPRAS），实现一键自动聚焦或 ROI 连续自动聚焦
Supported by IPRAS (Intelligent Passive Random Autofocus System) to autofocus or constantly autofocus under one key or AOI.

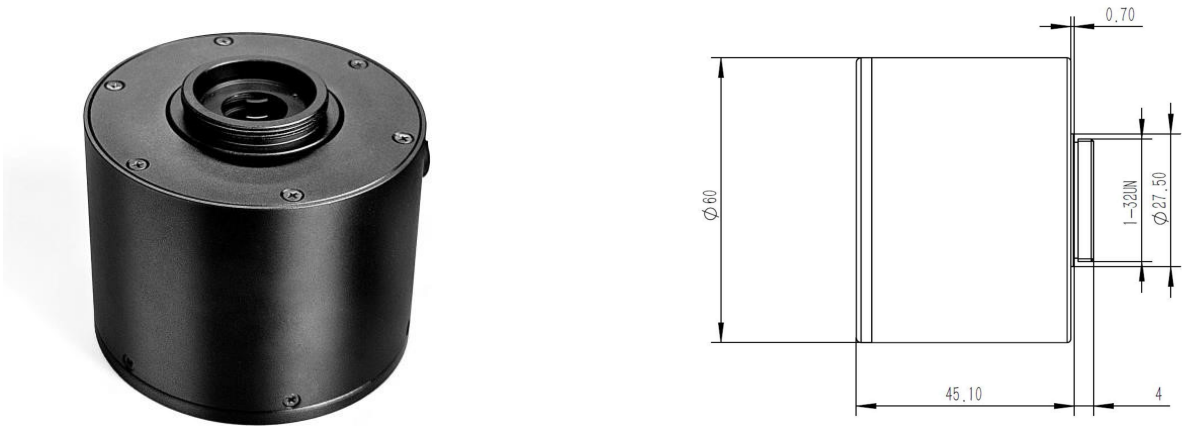

焦距EFL		25mm					工作 距离 W.D	倍率 Mag.	2/3"		1/1.8"	
靶面 Format		2/3" (Ø11)					80	0.3348	25.277	21.153	21.043	15.784
分辨率 Resolution		10MP					100	0.2619	32.295	27.024	26.900	20.177
接口Mount		C					150	0.1721	49.166	41.144	40.959	30.721
范 围 Range	光 圈 Aperture	F2.0					200	0.1289	65.610	54.903	54.664	40.998
	聚 焦 Focus	80mm					250	0.1033	81.873	68.508	68.214	51.159
控 制 Control	光圈 Iris	电动 Motorized					300	0.0863	98.049	82.040	81.688	61.263
	聚焦 Focus	电动 Motorized (Auto-focus)					350	0.0741	114.173	95.531	95.109	71.327
视场角 FOV	对角 Diagonal	2/3"	23.0°	1/1.8"	18.7°		400	0.0649	130.265	108.995	108.504	81.372
	水平 Horizontal		18.5°		14.8°		450	0.0578	146.325	122.440	121.885	91.405
	垂直 Vertical		14.0°		11.1°		500	0.0521	162.357	135.832	135.240	101.420
畸变 Distortion		< 0.1%					550	0.0474	178.383	149.240	148.589	111.429
机械后焦 M.B.L		13.5-9.45mm					600	0.0435	194.398	152.637	161.929	121.432
滤片尺寸 Filter Size		M27x0.5					650	0.0402	210.414	176.037	175.260	131.429
控制接口 Control Mount		USB					700	0.0373	226.426	189.431	188.586	141.421
工作温度 Working Temp.		-20℃ ~ +70℃					800	0.0328	258.408	216.187	215.228	161.398
外观尺寸 Measurement		45.1x60mm					900	0.0291	290.369	242.927	241.857	181.366
重量Weight		202g					1000	0.0263	322.327	269.662	268.479	201.327

USB线长度 USB Cable length: 1500mm