


SAF-RC1620-10M

- 通过USB 连接实现镜头聚焦、光圈电动控制 Connection via USB for controlling focus/Iris
- 2/3 英寸 1000 像素、70mm 工作距设计。2/3" 10Mpixel, macro working distance 70mm
- 配合无序被动聚焦系统（IPRAS），实现一键自动聚焦或 ROI 连续自动聚焦
Supported by IPRAS (Intelligent Passive Random Autofocus System) to autofocus or constantly autofocus under one key or ROI.

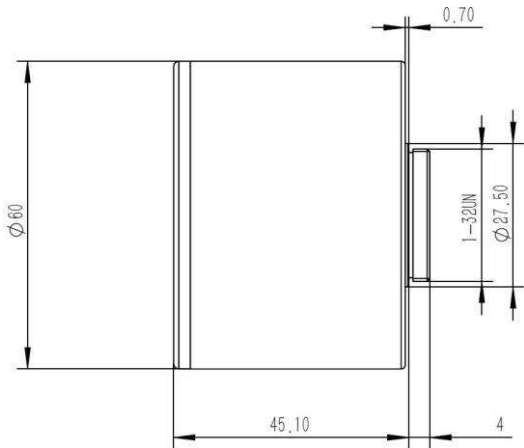

焦距EFL		25mm			工作 距离 W.D	倍率 Mag.	2/3"		1/1.8"		
靶面 Format		2/3" (Ø13)			70	0.2123	39.735	33.224	34.702	23.166	
分辨率 Resolution		10MP			100	0.1524	55.455	46.382	48.368	32.289	
接口Mount		C			150	0.1038	81.471	68.155	71.012	47.405	
范 围 Range	光 圈 Aperture	F2.0			200	0.0787	107.419	89.874	93.597	62.483	
	聚 焦 Focus	70mm			250	0.0634	133.347	111.574	116.149	77.538	
控 制 Control	光圈 Iris	电动 Motorized			300	0.0531	159.267	133.272	138.693	92.587	
	聚焦 Focus	电动 Motorized			350	0.0457	185.130	154.917	161.223	106.628	
视场角 FOV	对角 Diagonal	2/3"	38.2	1/1.8"	30.9	400	0.0401	211.016	176.594	183.763	122.675
	水平 Horizontal		29.6°		25.2°	450	0.0357	236.904	198.250	206.281	137.707
	垂直 Vertical		24.2°		17.0°	500	0.0322	262.788	219.916	228.811	152.748
畸变 Distortion		< 0.1%			550	0.0293	288.658	241.568	251.339	167.786	
机械后焦 M.B.L		13.52mm			600	0.0269	314.518	263.217	273.856	182.818	
滤片尺寸 Filter Size		M27x0.5			650	0.0249	340.400	284.874	296.377	197.853	
控制接口 Control Mount		USB			700	0.231	366.284	306.539	318.896	212.886	
工作温度 Working Temp.		-20℃ ~ +70℃			800	0.0203	418.017	349.839	363.933	242.951	
外观尺寸 Measurement		45.1x60mm			900	0.0180	469.762	393.149	408.967	273.015	
重量Weight		206g			1000	0.0162	521.482	436.439	454.013	303.086	

USB线长度 USB Cable length: 1500mm