


SAF-RC1218-5M | IPRAS-RC-M-23FA18

- 通过 USB 连接实现镜头聚焦、光圈电动控制 Connection via USB for controlling focus/Iris
- 2/3 英寸 500 像素、250mm 工作距设计 2/3" 5Mpixel WD250mm
- 配合无序被动聚焦系统（IPRAS），实现一键自动聚焦或 ROI 连续自动聚焦

Supported by IPRAS (Intelligent Passive Random Autofocus System) to autofocus or constantly autofocus under one key or AOI

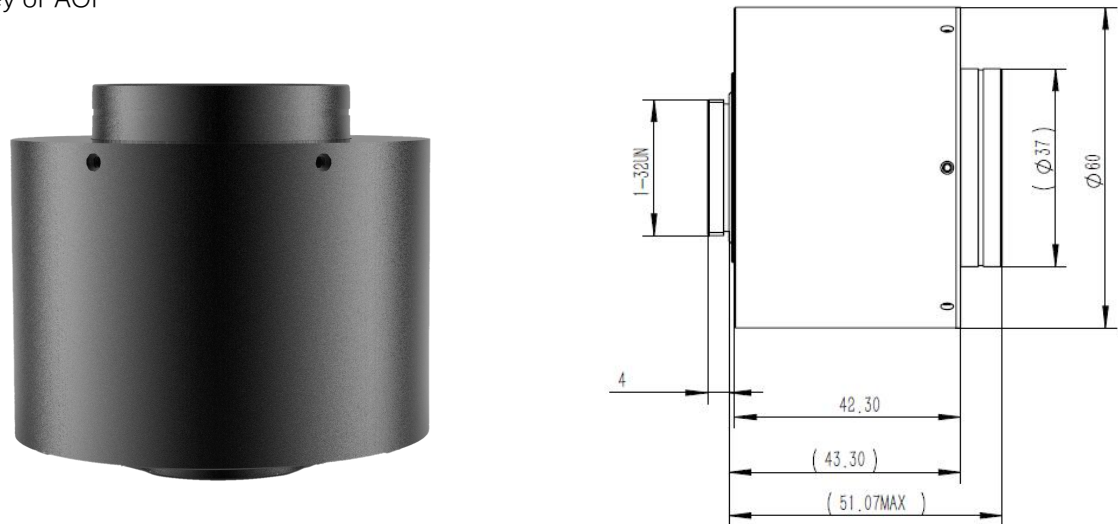

焦距EFL		12mm				工作 距离WD	倍率 Mag	2/3 “		1/1.8	
靶面Format		2/3" (Ø13)				—	—	—	—	—	—
分辨率Resolution		5MP				—	—	—	—	—	—
接口Mount		C				—	—	—	—	—	—
范围 Range	光 圈 Aperture	F1.8				—	—	—	—	—	—
	聚 焦 Focus	250mm				250	0.046	186.98	156.08	162.78	108.26
控制 Control	光 圈 Iris	电动Motorized				300	0.039	220.56	184.16	192.06	127.8
	聚 焦 Focus	电动Motorized(Autofocus)				350	0.033	254.14	212.26	221.32	147.34
视场 FOV	对角D	2/3"	50.7	1/1.8"	41.3	400	0.029	287.72	240.36	250.58	166.9
	水平H		40.3°		34.1°	450	0.026	321.3	268.46	279.84	186.44
	垂直V		30.8		23.3°	500	0.024	354.88	296.54	309.1	205.98
畸变Distortion		< 0.1%				550	0.022	388.46	324.64	338.36	225.52
机械后焦MBF		12.818mm				600	0.02	422.04	352.74	367.62	245.66
滤片尺寸Filter		M34.6x0.5				650	0.019	444.74	372.11	387.89	258.95
控制接口Interface		USB				700	0.017	489.2	408.92	426.16	284.16
工作温度Temp.		- 20℃ ~ +70℃				800	0.015	556.36	465.12	484.68	323.24
外观尺寸Size		51.07x60mm				900	0.013	623.52	521.32	543.20	362.34
重量（含线）Weight		253g				1000	0.012	690.68	577.5	601.72	401.42
通讯线长度Cable		1500mm									